


# 2H SANIPACKING® FILLS

## Anti-Legionella Fills for Cooling Towers

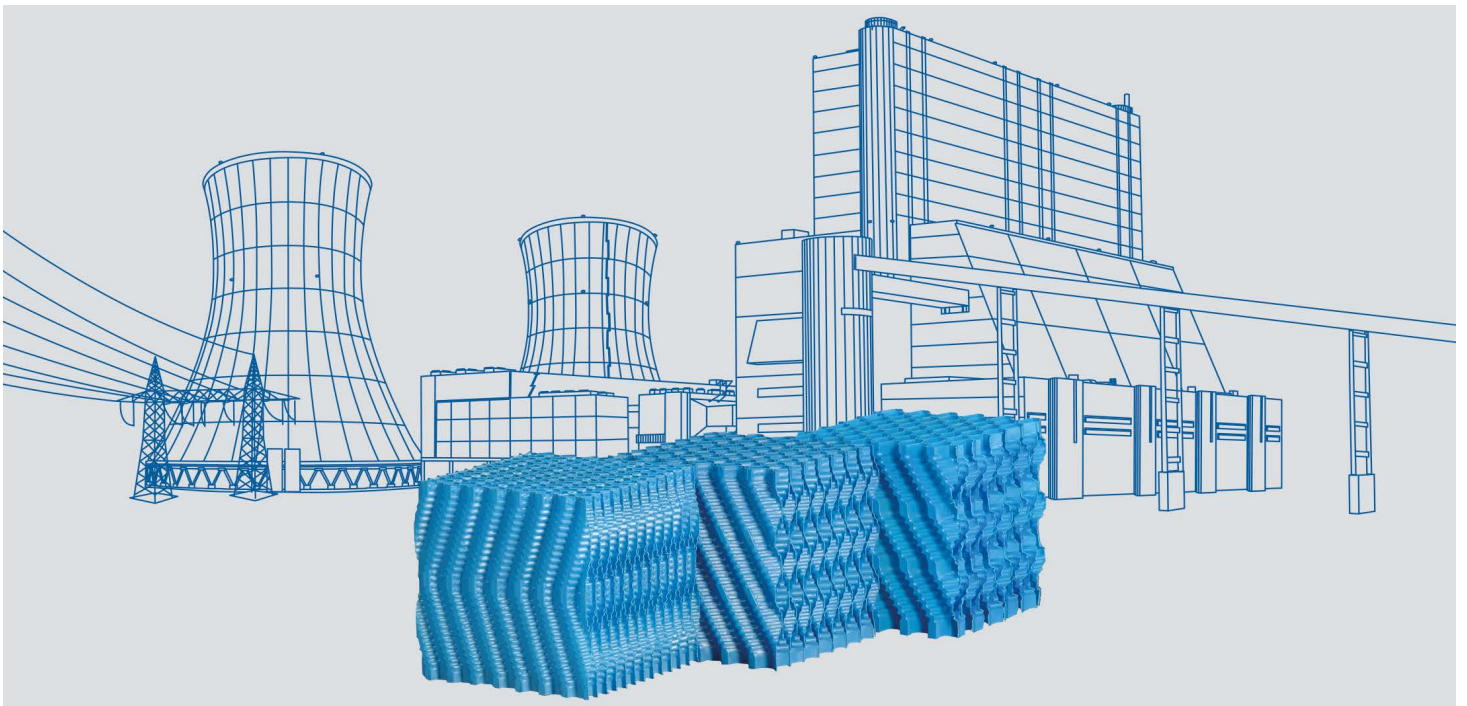

2H SANIPACKING® fill media are made of a special anti-bacterial Polypropylene (PP) compound. The biocide impregnated compound disrupts the metabolic process of unwanted micro-organisms at the cell wall level, thus interrupting their ability to function, grow and reproduce on the 2H SANIPACKING®.

Combined with regular maintenance and correct water treatment in the cooling circuit to prevent the formation of deposits and bacterial growth, 2H SANIPACKING® fills serve to minimize the risk of infections from legionella diseases.

### Features of our 2H SANIPACKING® Fills

- Prevents growth of Legionella pneumophila and other bacteria
- Durable
- Superior performance in heat exchange
- High temperature resistance (PP)
- High separation efficiency
- No brittleness or sharp edges
- High stability
- Economical installation

2H SANIPACKING® fill media impair the growth of Legionella pneumophila and other bacteria in open cooling circuits. They provide good leach and wash resistance. Under normal conditions this effect lasts for a minimum three to five years. As the fill media does not contain any heavy metals or arsenic they are safe to man and the environment.

Technical Data	
	PP
Max. length	96"
Max. width	12"
Max. Height	12 or 24"
Continuous operation temperature*	-4 – 176 °F
Max. application temp. (short term)*	194 °F

**Maximum tolerances:** On all dimensions +/- 3/4" or 2 % whichever is the greater. Other tolerances and dimensions by prior agreement.

\*Depending on recipe/additives higher temperatures can be reached by HT-additives.

Types			
Type	Material	Specific surface area	Corrugation height
		ft <sup>2</sup> /ft <sup>3</sup>	mm
KFP-SP 312	PP	73	12
KFP-SP 319	PP	46	19
KFP-SP 327	PP	38	27

**PP-material:**

Impact-resistant, environmentally friendly. Resistant to rot, fungi and most dissolved chemicals, UV-stabilized.

Performance Test			
	Reference sample	2H SANIPACKING®	Average anti-microbial activity (R)
After 24h	2.4 x 10 <sup>6</sup>	< 10	> 5,38

**2H SANIPACKING® Anti-Legionella Performance Test**

To test the performance of 2H SANIPACKING® fills and drift eliminators, the Japanese industry standard JIS Z 2801 (corresponding to ISO 22196) is used. The bacteria, in this case legionella (legionella pneumophila), are applied on a 2H SANIPACKING® foil sheet and bred over 24 h. After this period, the number of living bacteria is determined and compared to an untreated reference sample. The difference of both samples is represented by a logarithmized value R.

This information has been put together with greatest care. However, any performance data given in this leaflet is subject to compliance with certain surrounding conditions and hence may vary from case to case. Further, we reserve the right to make changes at any time without notice. We strongly recommend (i) reconfirmation with us whether this information is still fully valid, before using it for final designs and (ii) to verify performance data taking into account the actual surrounding conditions. We do not take any responsibility for any consequences due to non-compliance with these recommendations.



ENEXIO Water Technologies, Germany, is ISO 9001:2008 certified.

ENEXIO Water Technologies GmbH  
 2H Components and Solutions  
 Dieselweg 5, 48493 Wetrtingen, Germany  
 Phone +49 25 57 / 93 90 0, Fax +49 25 57 / 93 90 49  
 2h.germany@enexio.com  
 www.enexio.com

ENEXIO US LLC  
 2H Components and Solutions  
 10565 Greens Crossing Blvd, Suite 102  
 Houston, Texas 77038, USA  
 Phone +1-281-227-7900, Fax +1-281-929-0701  
 2h.americas@enexio.com | www.enexio.com

